




# PRESTO ROLLER BLIND

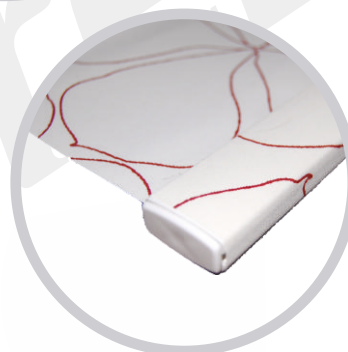

**Vertex S.A.**

POLAND  
43-502 Czechowice - Dziedzice  
ul. Bestwińska 25  
tel. +48 32 214 53 30-31  
[www.vertex.pl](http://www.vertex.pl)

## PRESTO ROLLER BLIND




Traditional way of sunlight protection and element of interior decoration.

- easy operating chain or spring mechanism
- it can be used to cover larger spaces
- smooth mounting to the wall, ceiling or niche
- wide range of fabrics available
- it can be used with a decorative frill

# ROLLER BLIND



## Components:

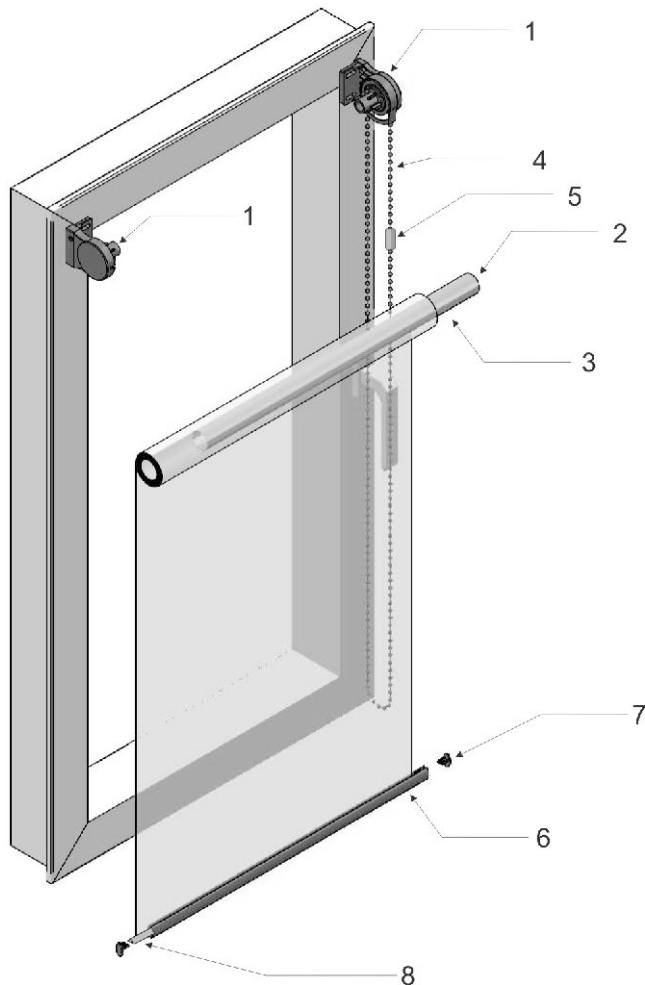

## Technical informations:

### Dimensions:

Max. width of Presto roller blind is 2,8 m.  
For valid price calculation min. width is 0,5 m.  
Standard height depends on fabrics and it's between 1,43 – 1,8 m.  
Max. available height (with extra charge) depends on fabric's thickness and it's between 2 - 3 m.

### Colouring:

Standard Presto colours are: white, brown, light brown.

### Assembly:

Presto roller blind is fixed with screws to the wall, ceiling or window niche.

### Additional informations:

Fabric-sealed extender or decorative flounce available (various types).  
There is possibility to install electric motors in Presto roller blind.

- |   |  |  |
|---|--|--|
| ① |  | Beads mechanism set                        |
| ② |  | Tube 25x0,6mm aluminium                    |
| ③ |  | Tube 32x0,9 mm aluminium                   |
| ④ |  | Chain operational                          |
| ⑤ |  | Chain operational connector                |
| ⑥ |  | Bottom rail V                              |
| ⑦ |  | Bottom rail V end plug                     |
| ⑧ |  | Brushed rubber                             |
|   |  | Blockade tape 7mm<br>Tape two-sided yellow |